


Inspection Certification	LKT-1613		
Customer	Skywalk	Stand	Rev. 1.2 - 28.06.2013
Testlocation	Bad Grönenbach	12,5 N	Messungenauigkeit
Date	04.04.17		
Bending	5000	Temp./humi.	20,1° - 44%
Line-Manufacturer	Liros		
Articel	PPSLS-65	Line diameter	
Req. strength	650 N		
Material	Dyneema / PES	Color	orange
length of seam - mm		Kind of seam	NZZ
Description/Norm	Bending test confirm EN 926-1 & LTF 91/09		

Results			
	Max. strength unbended	579,0 N	89,1 % from req. Strength
	Max. strength Test 1	506,0 N	77,8 %
	Max. strength Test 2	542,0 N	83,4 %
	Max. strength Test 3	524,0 N	80,6 %
	Test Result average	524,0 N	Result with MU
	Test Result minimum	506,0 N	493,5 N

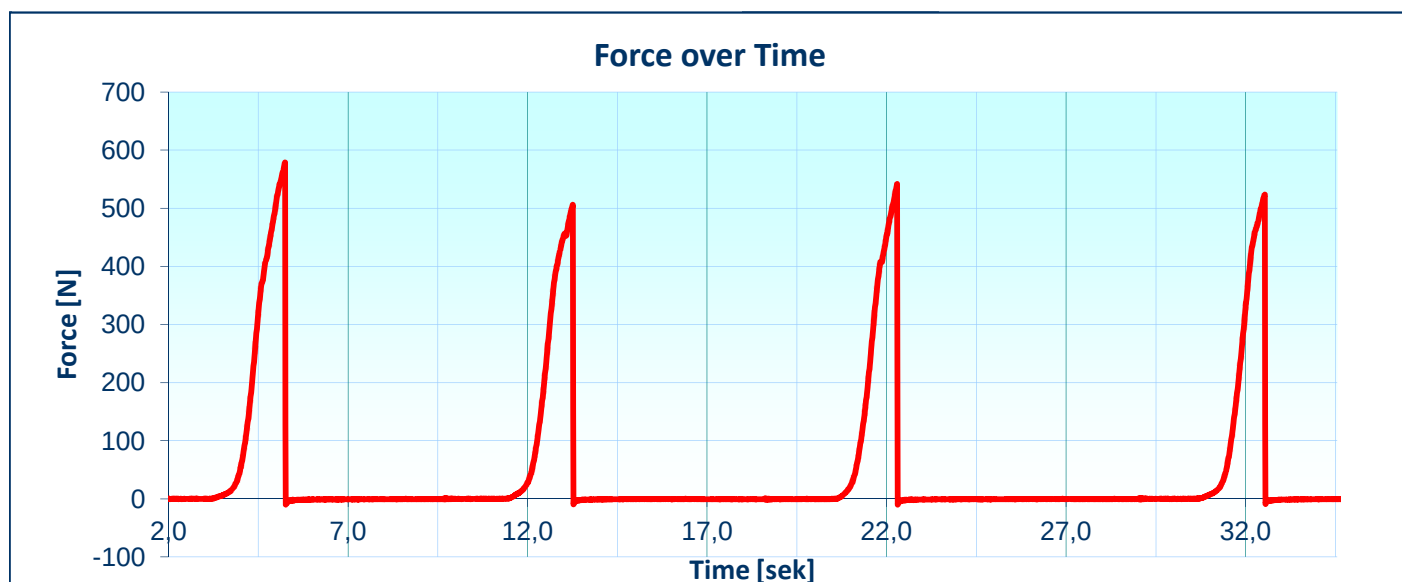

Bad Grönenbach, den 04.04.2017

Guido Reich
Inspector