


Inspection Certification			
Customer	Skywalk	Stand	Rev. 1.2 - 28.06.2013
Testlocation	Bad Grönenbach	12,5 N	Messungenauigkeit
Date	19.10.16		
Bending	5000	Temp./humi.	20,1° - 44%
Line-Manufacturer	Liros		
Articel	PPSLS180	Line diameter	
Req. strength	1800 N		
Material	Dyneema/ PES	Color	gelb
length of seam - mm		Kind of seam	NZZ
Description/Norm	Bending test confirm EN 926-1 & LTF 91/09		

Results			
	Max. strength unbended	1772,0 N	98,4 % from req. Strength
	Max. strength Test 1	1616,0 N	89,8 %
	Max. strength Test 2	1651,0 N	91,7 %
	Max. strength Test 3	1730,0 N	96,1 %
	Test Result average	1665,7 N	Result with MU
	Test Result minimum	1616,0 N	1603,5 N

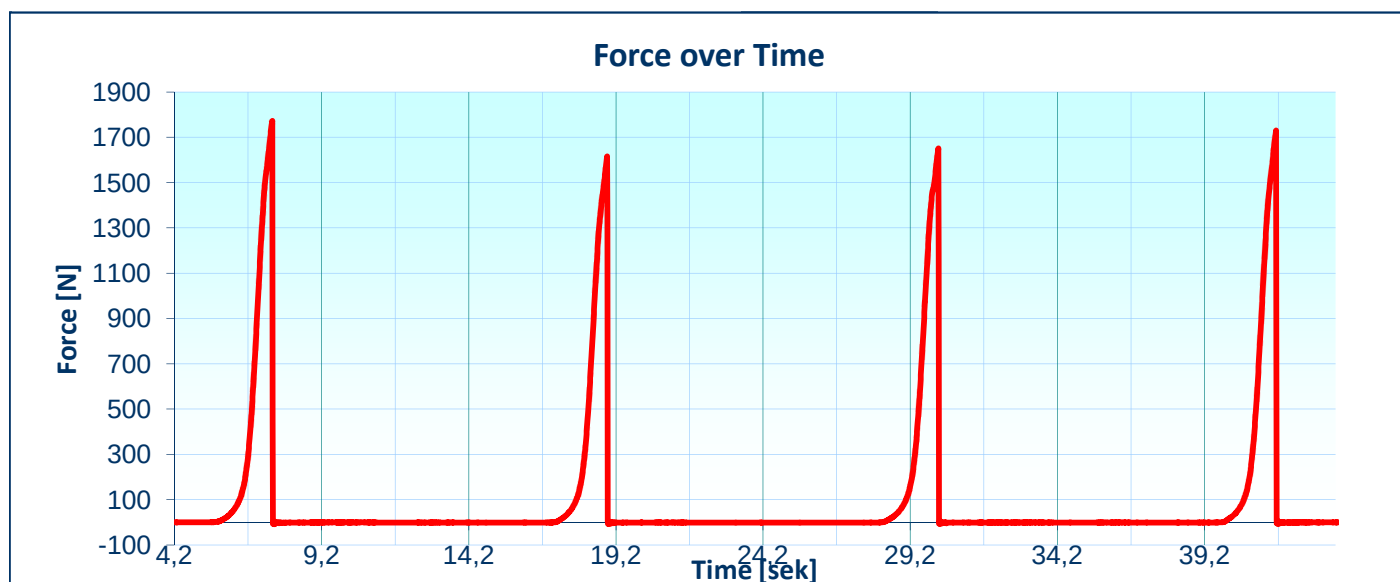

Bad Grönenbach, den 20.10.2016

Guido Reiser

Inspector