


Inspection Certification Rev. 1.0 -05.07.2017	1720		
Testlocation	Bad Grönenbach	Sensor/HZ	ME-KM26z-5 kN
Standard	926-1:2016 - 4.6	Amplifier/HZ	ME-GSV-2AS - 100 Hz
Date	31.07.2017	Last Calibration	D-L-17552-01-00- 2017-02
Inspector	Guido Reusch	Measuring uncertainty	12,5 N
Line-Manufacturer	Edelrid	Temp./humi.	22,7° - 63%
Articel	7343-140	Line diameter	1,3 mm
Req. Strength by Mf	1400 N	Line length overall	500 mm
Material	Polyester/Technora	Color	citro
length of seam - mm	80	Kind of seam	NZZ - T/B-D 10mm
Production description	23.06.2017, Rev. 1		

Results

Max. strength unbended	1181,0 N	84,4 % from req. Strength
Max. strength Test 1	780,0 N	55,7 %
Max. strength Test 2	772,0 N	55,1 %
Max. strength Test 3	721,0 N	51,5 %
Test Result average	757,7 N	Result with MU
Test Result minimum	721,0 N	708,5 N

Force over Time

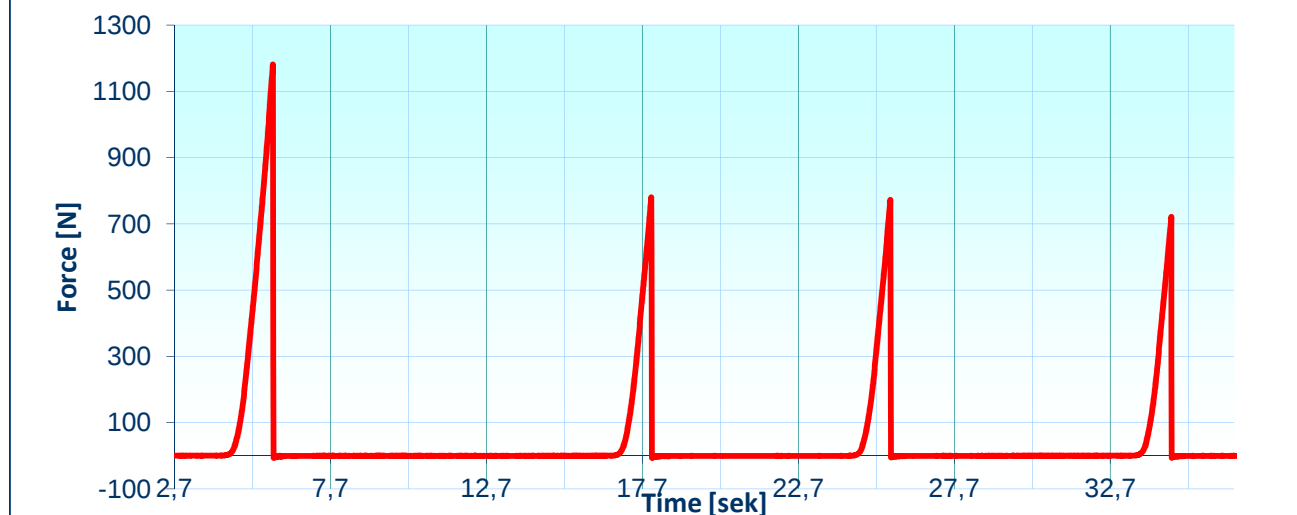

Bad Grönenbach, 03.08.2017


Guido Reusch
Inspector

Needle 70
Thread American Effierd Polyester Tex 45 bond threads

