


Inspection Certification Rev. 1.0 -05.07.2017	1740		
Testlocation	Bad Grönenbach	Sensor/HZ	ME-KM26z-5 kN
Standard	926-1:2016 - 4.6	Amplifier/HZ	ME-GSV-2AS - 100 Hz
Date	05.08.2017	Last Calibration	D-L-17552-01-00- 2017-02
Inspector	Guido Reusch	Measuring uncertainty	12,5 N
Line-Manufacturer	Edelrid	Temp./humi.	22,7° - 63%
Articel	8000-360	Line diameter	1,5*1,9
Req. Strength by Mf	1900 N	Line length overall	500 mm
Material	Technora/-	Color	red
length of seam - mm	90in 50	Kind of seam	Step
Production description	23.06.2017, Rev. 1		

Results

Max. strength unbended	3710,0 N	195,3 % from req. Strength
Max. strength Test 1	2439,0 N	128,4 %
Max. strength Test 2	1936,0 N	101,9 %
Max. strength Test 3	1859,0 N	97,8 %
Test Result average	2078,0 N	Result with MU
Test Result minimum	1859,0 N	1846,5 N

Force over Time

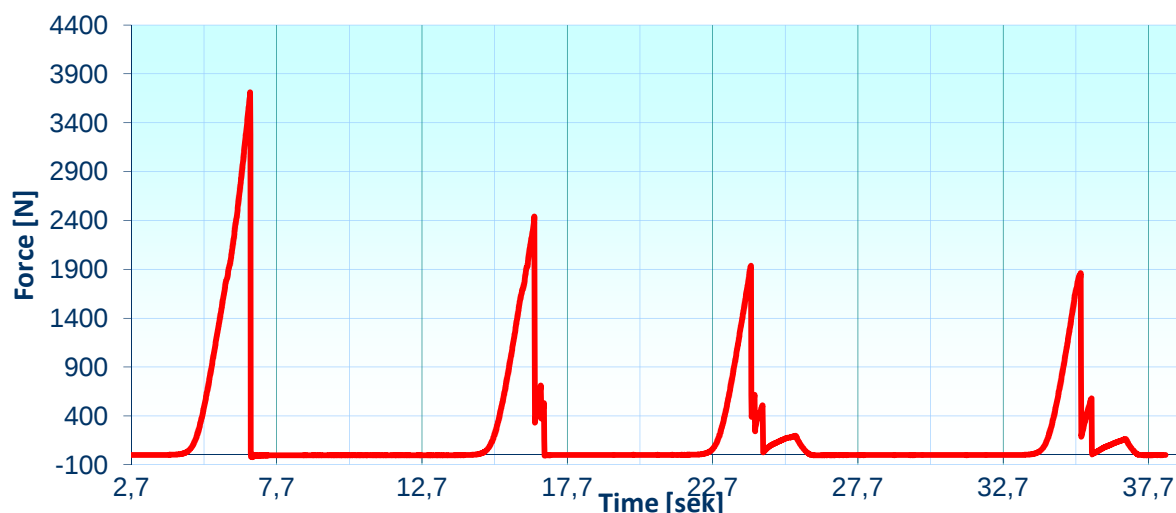

Bad Grönenbach, 05.08.2017

Guido Reusch
Inspector

Production description **Edelrid**
8000-360

Test No. **1740**
Date **05 August 2017**

Needle
Thread

70
American Effierd Polyester Tex 45 bond threads

