


Inspection Certification Rev. 1.0 -05.07.2017		1776	
Testlocation	Bad Grönenbach	Sensor/HZ	ME-KM26z-5 kN
Standard	926-1:2016 - 4.6	Amplifier/HZ	ME-GSV-2AS - 100 Hz
Date	30.08.2017	Last Calibration	D-L-17552-01-00- 2017-02
Inspector	Guido Reusch	Measuring uncertainty	12,5 N
Line-Manufacturer	Liros	Temp./humi.	22,7° -62%
Articel	DC 100	Line diameter	0,8 mm
Req. Strength by Mf	1000 N	Line length overall	500 mm
Material	Dyneema/	Color	white
length of seam - mm	70in50	Kind of seam	Step
Production description	06.07.2017, Rev. 1		

Results		
Max. strength unbended	1027,0 N	102,7 % from req. Strength
Max. strength Test 1	898,0 N	89,8 %
Max. strength Test 2	909,0 N	90,9 %
Max. strength Test 3	827,0 N	82,7 %
Test Result average	878,0 N	Result with MU
Test Result minimum	827,0 N	814,5 N

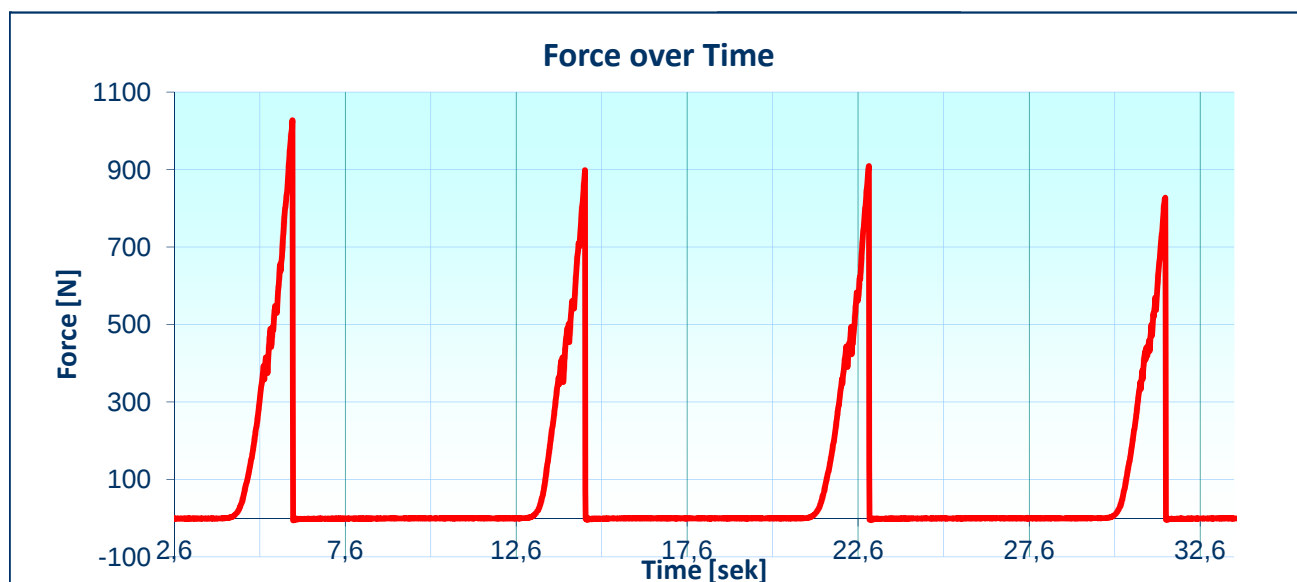

Bad Grönenbach, 31.08.2017

Guido Reusch
Inspector

Needle
Thread

70
American Effierd Polyester Tex 45 bond threads

