


Inspection Certification Rev. 1.0 -05.07.2017	1760		
Testlocation	Bad Grönenbach	Sensor/HZ	ME-KM26z-5 kN
Standard	926-1:2016 - 4.6	Amplifier/HZ	ME-GSV-2AS - 100 Hz
Date	18.08.2017	Last Calibration	D-L-17552-01-00- 2017-02
Inspector	Guido Reusch	Measuring uncertainty	12,5 N
Line-Manufacturer	Liros	Temp./humi.	21,3° - 55%
Articel	DC 120	Line diameter	0,9 mm
Req. Strength by Mf	1200 N	Line length overall	500 mm
Material	Dyneema---	Color	white
length of seam - mm	70in50	Kind of seam	Step
Production description	06.07.2017, Rev. 1		

Results

Max. strength unbended	1317,0 N	109,8 % from req. Strength
Max. strength Test 1	1294,0 N	107,8 %
Max. strength Test 2	1368,0 N	114,0 %
Max. strength Test 3	1432,0 N	119,3 %
Test Result average	1364,7 N	Result with MU
Test Result minimum	1294,0 N	1281,5 N

Force over Time

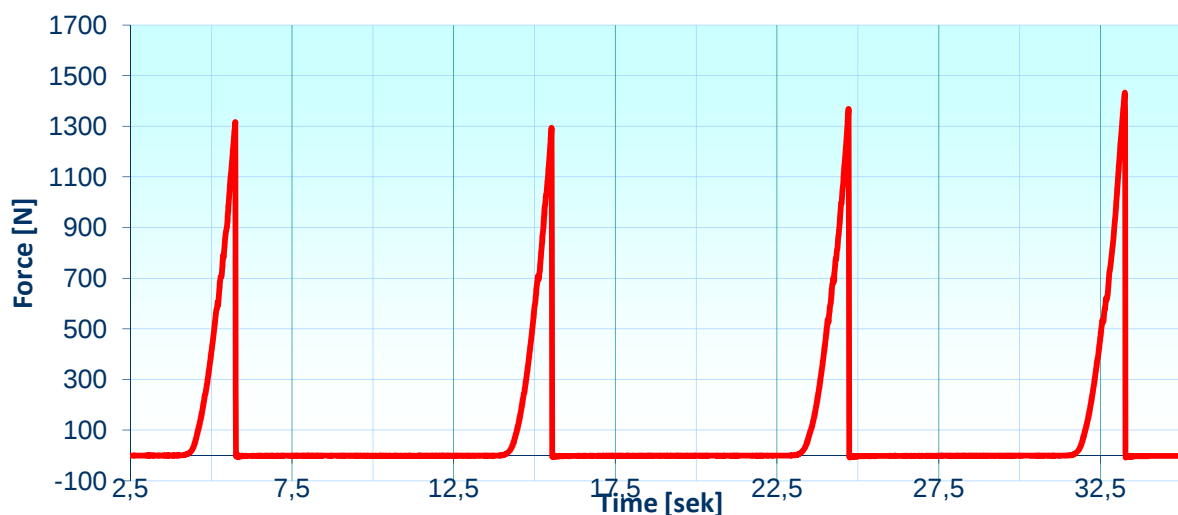

Bad Grönenbach, 18.08.2017

Guido Reusch
Inspector

Needle
Thread

70
American Effierd Polyester Tex 45 bond threads

