


Inspection Certification Rev. 1.0 -05.07.2017		1758	
Testlocation	Bad Grönenbach	Sensor/HZ	ME-KM26z-5 kN
Standard	926-1:2016 - 4.6	Amplifier/HZ	ME-GSV-2AS - 100 Hz
Date	18.08.2017	Last Calibration	D-L-17552-01-00- 2017-02
Inspector	Guido Reusch	Measuring uncertainty	12,5 N
Line-Manufacturer	Liros	Temp./humi.	21,3° - 55%
Articel	DC 40	Line diameter	0,5 mm
Req. Strength by Mf	400 N	Line length overall	500 mm
Material	Dyneema---	Color	yellow
length of seam - mm	60in50	Kind of seam	Step
Production description	06.07.2017, Rev. 1		

Results

Max. strength unbended	535,0 N	133,8 % from req. Strength
Max. strength Test 1	456,0 N	114,0 %
Max. strength Test 2	461,0 N	115,3 %
Max. strength Test 3	506,0 N	126,5 %
Test Result average	474,3 N	Result with MU
Test Result minimum	456,0 N	443,5 N

Force over Time

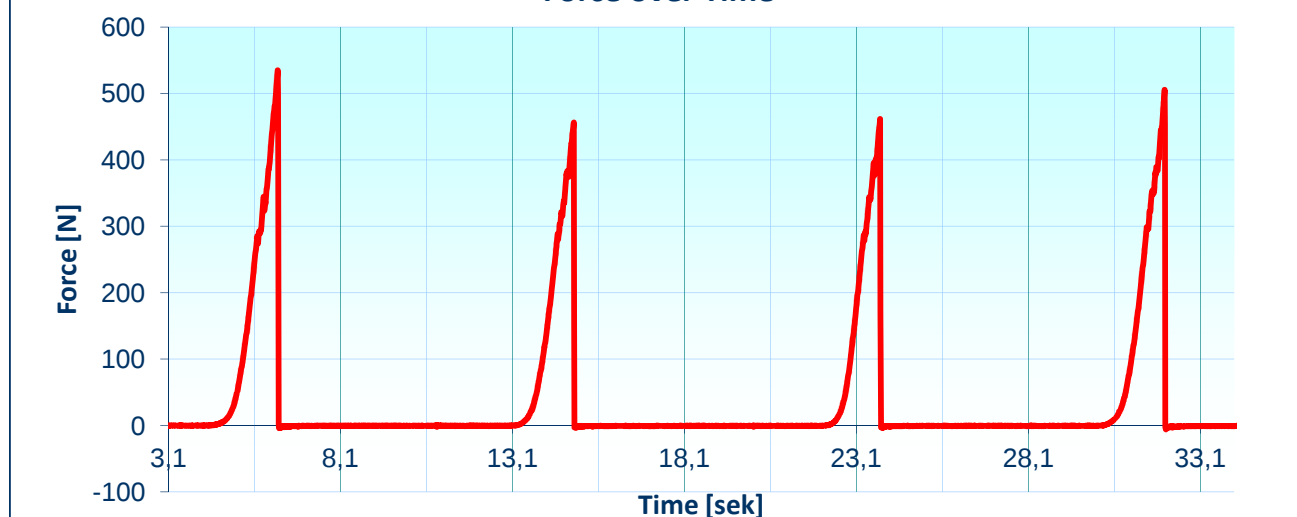

Bad Grönenbach, 18.08.2017



Guido Reusch

Inspector

Needle 70
Thread American Effierd Polyester Tex 45 bond threads

