


Inspection Certification Rev. 1.0 -05.07.2017	1788		
Testlocation	Bad Grönenbach	Sensor/HZ	ME-KM26z-5 kN
Standard	926-1:2016 - 4.6	Amplifier/HZ	ME-GSV-2AS - 100 Hz
Date	10.09.2017	Last Calibration	D-L-17552-01-00- 2017-02
Inspector	Guido Reusch	Measuring uncertainty	12,5 N
Line-Manufacturer	Liros	Temp./humi.	22,7° -62%
Articel	PPSLS 260	Line diameter	1,6 mm
Req. Strength by Mf	2600 N	Line length overall	500 mm
Material	Polyester/Dyneema	Color	blue
length of seam - mm	100	Kind of seam	NZZ T/B-D 10mm
Production description	06.07.2017, Rev. 1		

Results		
Max. strength unbended	2224,0 N	85,5 % from req. Strength
Max. strength Test 1	2162,0 N	83,2 %
Max. strength Test 2	2140,0 N	82,3 %
Max. strength Test 3	2146,0 N	82,5 %
Test Result average	2149,3 N	Result with MU
Test Result minimum	2140,0 N	2127,5 N

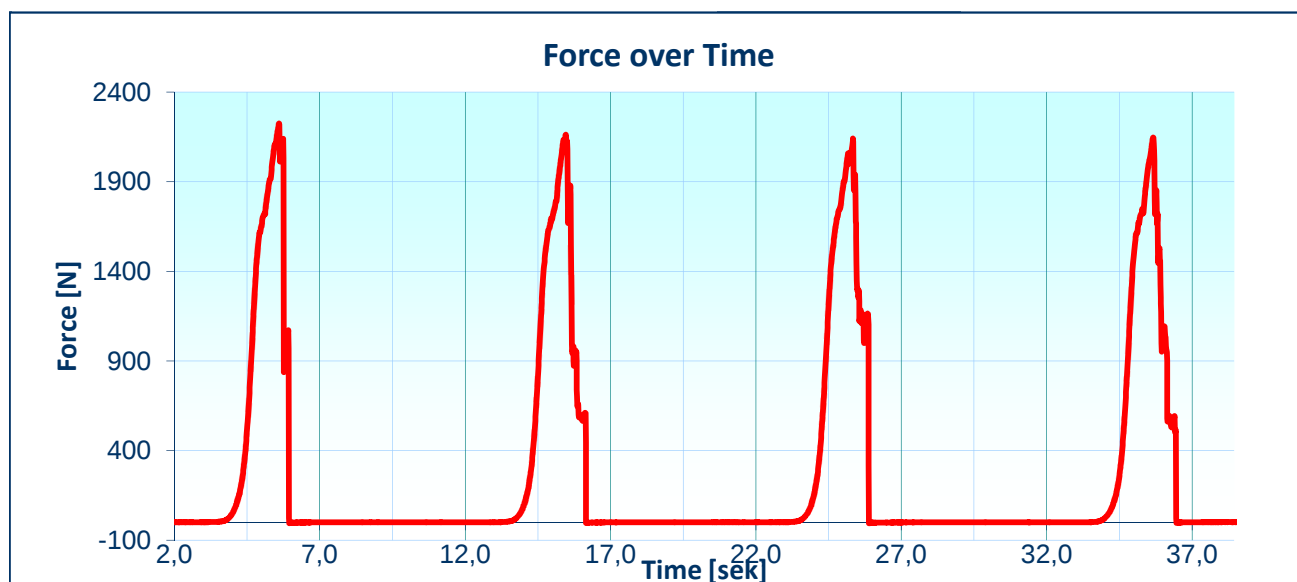

Bad Grönenbach, 14.09.2017

Guido Reusch
Inspector

Needle 80
Thread American Effierd Polyester Tex 45 bond threads

