


Inspection Certification Rev. 1.0 -05.07.2017	1757		
Testlocation	Bad Grönenbach	Sensor/HZ	ME-KM26z-5 kN
Standard	926-1:2016 - 4.6	Amplifier/HZ	ME-GSV-2AS - 100 Hz
Date	18.08.2017	Last Calibration	D-L-17552-01-00- 2017-02
Inspector	Guido Reusch	Measuring uncertainty	12,5 N
Line-Manufacturer	Edelrid	Temp./humi.	21,3° - 55%
Articel	8000-280	Line diameter	1,3 * 1,7
Req. Strength by Mf	2800 N	Line length overall	500 mm
Material	Technora/---	Color	red
length of seam - mm	80in50	Kind of seam	Step
Production description	23.06.2017, Rev. 1		

Results

Max. strength unbended	2489,0 N	88,9 % from req. Strength
Max. strength Test 1	1518,0 N	54,2 %
Max. strength Test 2	1710,0 N	61,1 %
Max. strength Test 3	1860,0 N	66,4 %
Test Result average	1696,0 N	Result with MU
Test Result minimum	1518,0 N	1505,5 N

Force over Time

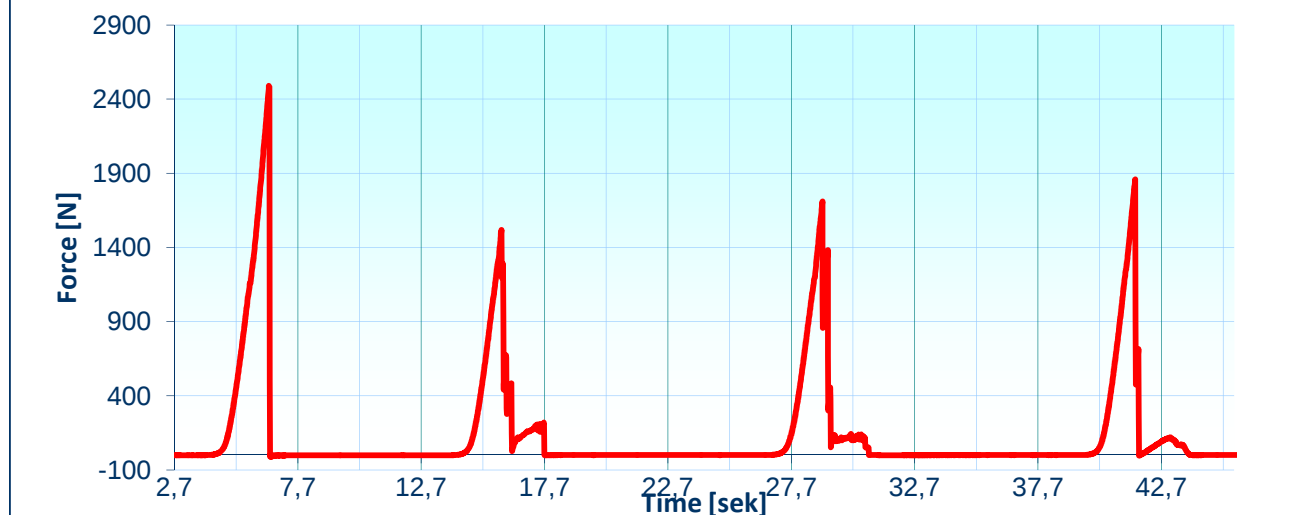

Bad Grönenbach, 18.08.2017

Guido Reusch
Inspector

Needle 70
Thread American Effierd Polyester Tex 45 bond threads

