


|                                                         |                    |                       |                          |
|---------------------------------------------------------|--------------------|-----------------------|--------------------------|
| <b>Inspection Certification</b><br>Rev. 1.0 -05.07.2017 |                    | <b>1719</b>           |                          |
| Testlocation                                            | Bad Grönenbach     | Sensor/HZ             | ME-KM26z-5 kN            |
| Standard                                                | 926-1:2016 - 4.6   | Amplifier/HZ          | ME-GSV-2AS - 100 Hz      |
| Date                                                    | 31.07.2017         | Last Calibration      | D-L-17552-01-00- 2017-02 |
| Inspector                                               | Guido Reusch       | Measuring uncertainty | 12,5 N                   |
| Line-Manufacturer                                       | Edelrid            | Temp./humi.           | 22,7° - 63%              |
| Articel                                                 | 7343-90            | Line diameter         | 1,2 mm                   |
| Req. Strength by Mf                                     | 900 N              | Line length overall   | 500 mm                   |
| Material                                                | Polyester/Technora | Color                 | red                      |
| length of seam - mm                                     | 80                 | Kind of seam          | NZZ - T/B-D 10mm         |
| Production description                                  | 23.06.2017, Rev. 1 |                       |                          |


### Results

|                        |         |                           |
|------------------------|---------|---------------------------|
| Max. strength unbended | 873,0 N | 97,0 % from req. Strength |
| Max. strength Test 1   | 520,0 N | 57,8 %                    |
| Max. strength Test 2   | 537,0 N | 59,7 %                    |
| Max. strength Test 3   | 520,0 N | 57,8 %                    |
| Test Result average    | 525,7 N | Result with MU            |
| Test Result minimum    | 520,0 N | 507,5 N                   |

### Force over Time

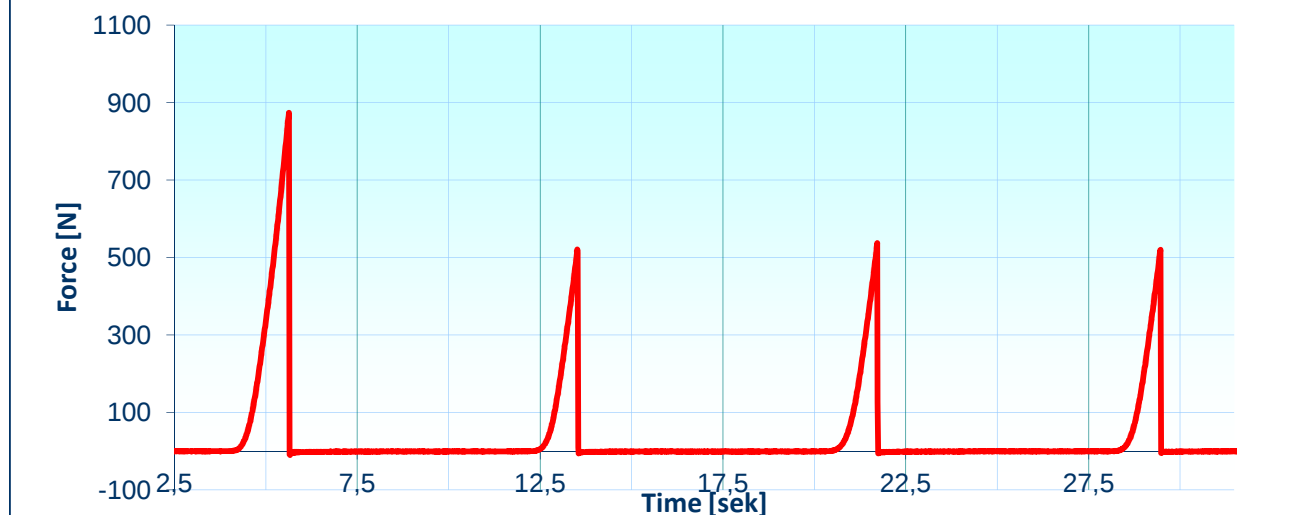

Bad Grönenbach, 03.08.2017

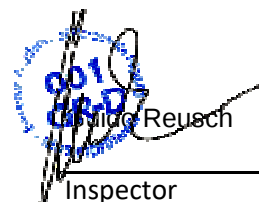  
Inspector

Needle 70  
Thread American Effierd Polyester Tex 45 bond threads

