


Inspection Certification Rev. 1.0 -05.07.2017	1725		
Testlocation	Bad Grönenbach	Sensor/HZ	ME-KM26z-5 kN
Standard	926-1:2016 - 4.6	Amplifier/HZ	ME-GSV-2AS - 100 Hz
Date	31.07.2017	Last Calibration	D-L-17552-01-00- 2017-02
Inspector	Guido Reusch	Measuring uncertainty	12,5 N
Line-Manufacturer	Edelrid	Temp./humi.	22,7° - 63%
Articel	7850-100	Line diameter	1,1 mm
Req. Strength by Mf	1000 N	Line length overall	500 mm
Material	Polyester/Dyneema	Color	turquoise citro
length of seam - mm	80	Kind of seam	NZZ - T/B-D 10mm
Production description	23.06.2017, Rev. 1		

Results

Max. strength unbended	888,0 N	88,8 % from req. Strength
Max. strength Test 1	982,0 N	98,2 %
Max. strength Test 2	951,0 N	95,1 %
Max. strength Test 3	992,0 N	99,2 %
Test Result average	975,0 N	Result with MU
Test Result minimum	951,0 N	938,5 N

Force over Time

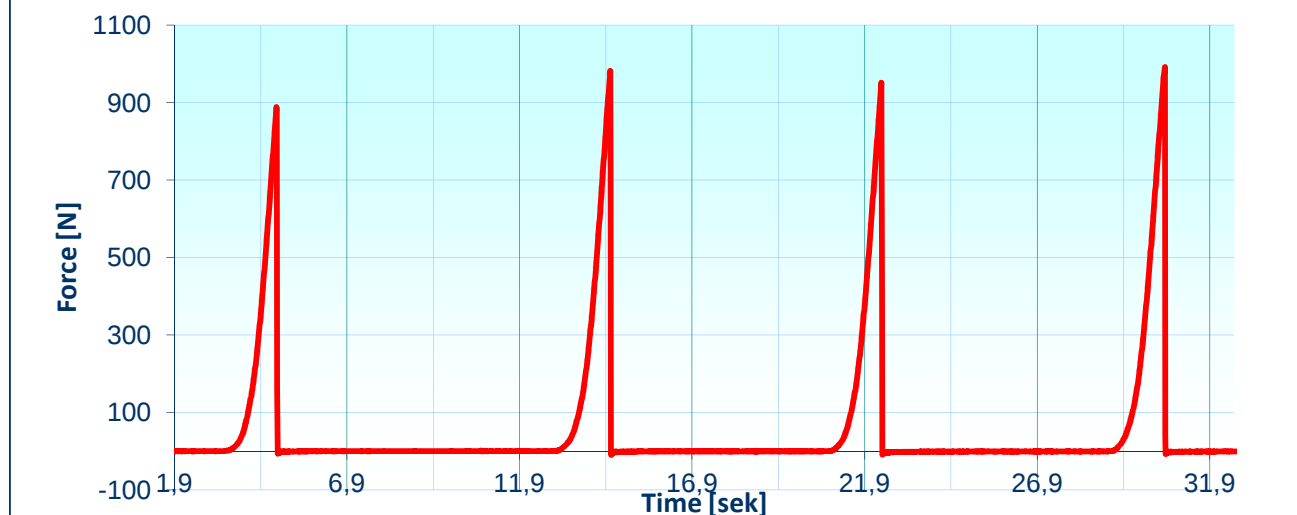

Bad Grönenbach, 03.08.2017

Guido Reusch
Inspector

Needle
Thread

70
American Effierd Polyester Tex 45 bond threads

