


Inspection Certification Rev. 1.0 -05.07.2017	1728		
Testlocation	Bad Grönenbach	Sensor/HZ	ME-KM26z-5 kN
Standard	926-1:2016 - 4.6	Amplifier/HZ	ME-GSV-2AS - 100 Hz
Date	31.07.2017	Last Calibration	D-L-17552-01-00- 2017-02
Inspector	Guido Reusch	Measuring uncertainty	12,5 N
Line-Manufacturer	Edelrid	Temp./humi.	22,7° - 63%
Articel	7950-80	Line diameter	0,9 mm
Req. Strength by Mf	800 N	Line length overall	500 mm
Material	Polyester/Dyneema	Color	citro
length of seam - mm	60	Kind of seam	NZZ - T/B-D 10mm
Production description	23.06.2017, Rev. 1		

Results			
Max. strength unbended	714,0 N	89,3 % from req. Strength	
Max. strength Test 1	725,0 N	90,6 %	
Max. strength Test 2	728,0 N	91,0 %	
Max. strength Test 3	685,0 N	85,6 %	
Test Result average	712,7 N	Result with MU	
Test Result minimum	685,0 N	672,5 N	

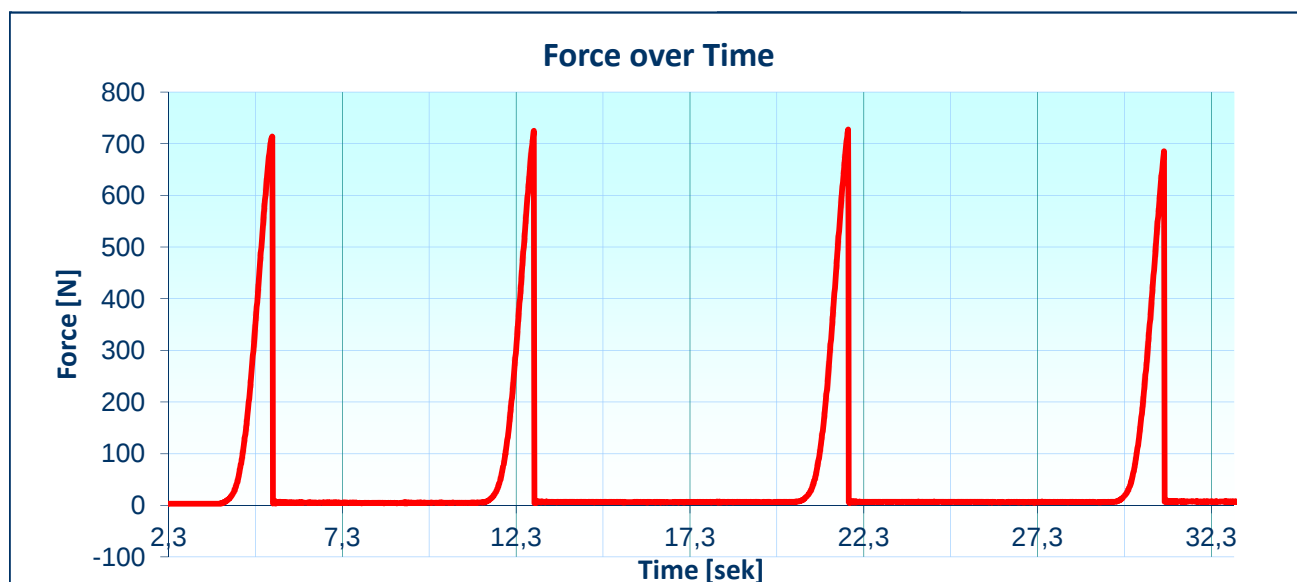

Bad Grönenbach, 03.08.2017


Inspector

Production description **Edelrid**
7950-80

Test No. **1728**
Date **31 July 2017**

Needle 70
Thread American Effierd Polyester Tex 45 bond threads

