


Pos	Material	Comment	breaking strength bended(daN)	Numbe r of	Level				
					0	1	2	3	4
a1	DC60		66,3	2			132,6		
a2	DC60		66,3	2			132,6		
a3	DC60		66,3	2			132,6		
a4	DC60		66,3	2			132,6		
a5	DC60		66,3	2			132,6		
a6	DC60		66,3	2			132,6		
a7	DC60		66,3	2			132,6		
a8	DC60		66,3	2			132,6		
a9	DC60		66,3	2			132,6		
a10	DC60		66,3	2			132,6		
a11	DC60		66,3	2			132,6		
a12	DC60		66,3	2			132,6		
am1	PPSLSt125		89,5	2		179,0			
am2	PPSLSt125		89,5	2		179,0			
am3	PPSLSt125		89,5	2		179,0			
am4	PPSLSt125		89,5	2		179,0			
am5	PPSLSt125		89,5	2		179,0			
am6	PPSLSt125		89,5	2		179,0			
as1	PPSLSt180		137,8	2	275,6				
as2	PPSLSt180		137,8	2	275,6				
as3	PPSLSt125		89,5	2	179,0				
b1	DC60		66,3	2			132,6		
b2	DC60		66,3	2			132,6		
b3	DC60		66,3	2			132,6		
b4	DC60		66,3	2			132,6		
b5	DC60		66,3	2			132,6		
b6	DC60		66,3	2			132,6		
b7	DC60		66,3	2			132,6		
b8	DC60		66,3	2			132,6		
b9	DC60		66,3	2			132,6		
b10	DC60		66,3	2			132,6		
b11	DC60		66,3	2			132,6		
b12	DC60		66,3	2			132,6		
bm1	PPSLSt125		89,5	2		179,0			
bm2	PPSLSt125		89,5	2		179,0			
bm3	PPSLSt125		89,5	2		179,0			
bm4	PPSLSt125		89,5	2		179,0			
bm5	PPSLSt125		89,5	2		179,0			
bm6	PPSLSt125		89,5	2		179,0			
bs1	PPSLSt180		137,8	2	275,6				
bs2	PPSLSt180		137,8	2	275,6				
bs3	PPSLSt125		89,5	2	179,0				
c1a	DC60		66,3	2			132,6		
c2a	DC60		66,3	2			132,6		
c3a	DC60		66,3	2			132,6		
c4a	DC60		66,3	2			132,6		
c5a	DC60		66,3	2			132,6		
c6a	DC60		66,3	2			132,6		
c7a	DC60		66,3	2			132,6		
c8a	DC60		66,3	2			132,6		
c9	DC60		66,3	2			132,6		
c10	DC60		66,3	2			132,6		
c11	DC60		66,3	2			132,6		
c12	DC60		66,3	2			132,6		
cm1	PPSLSt125		89,5	2		179,0			
cm2	PPSLSt125		89,5	2		179,0			
cm3	PPSLSt125		89,5	2		179,0			
cm4	PPSLSt125		89,5	2		179,0			
cm5	PPSLSt125		89,5	2		179,0			
cm6	PPSLSt125		89,5	2		179,0			
cs1	PPSLSt180		137,8	2	275,6				
cs2	PPSLSt180		137,8	2	275,6				
cs3	PPSLSt125		89,5	2	179,0				
c1b	DC60		66,3	2			132,6		
c2b	DC60		66,3	2			132,6		
c3b	DC60		66,3	2			132,6		
c4b	DC60		66,3	2			132,6		
c5b	DC60		66,3	2			132,6		
c6b	DC60		66,3	2			132,6		
c7b	DC60		66,3	2			132,6		
c8b	DC60		66,3	2			132,6		
a13	DC60		66,3	2			132,6		
b13	DC60		66,3	2			132,6		
c13	DC60		66,3	2			132,6		
a14	DC60		66,3	2			132,6		
b14	DC60		66,3	2			132,6		
c14	DC60		66,3	2			132,6		
am7	PPSLSt65		46,4	2		92,8			
bm7	PPSLSt65		46,4	2		92,8			
bm1	PPSLSt65		46,4	2		92,8			
cm1	PPSLSt65		46,4	2		92,8			
as4	PPSLSt125		89,5	2	179,0				
Fbreak Level					2370	3593	6630	0	
Wmax Level					169	257	474	0	daN
					132,6	179,0	132,6	132,6	132,6

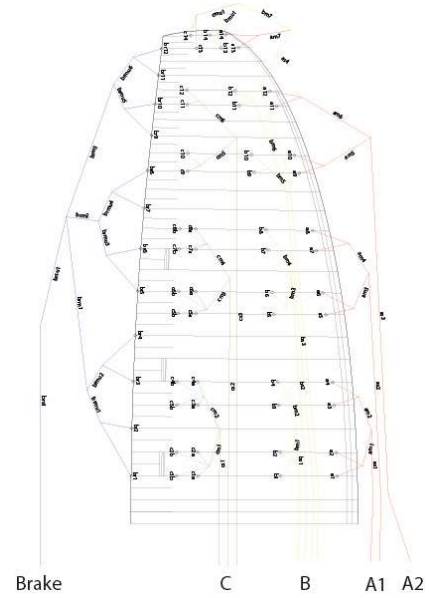

Pos	Material	Comment	breaking strength bended	Numbe r of	Level				
					0	1	2	3	4
br1	PPSLSt65		46,4	2				92,8	
br2	PPSLSt65		46,4	2				92,8	
br3	PPSLSt65		46,4	2				92,8	
br4	PPSLSt65		46,4	2				92,8	
br5	PPSLSt65		46,4	2				92,8	
br6	PPSLSt65		46,4	2				92,8	
br7	PPSLSt65		46,4	2				92,8	
br8	PPSLSt65		46,4	2				92,8	
br9	PPSLSt65		46,4	2				92,8	
br10	PPSLSt65		46,4	2				92,8	
br11	PPSLSt65		46,4	2				92,8	
br12	PPSLSt65		46,4	2				92,8	
brmu1	PPSLSt65		46,4	2			92,8		
brmu2	PPSLSt65		46,4	2			92,8		
brmu3	PPSLSt65		46,4	2			92,8		
brmu4	PPSLSt65		46,4	2			92,8		
brmu5	PPSLSt65		46,4	2			92,8		
brmu6	PPSLSt65		46,4	2			92,8		
brm1	PPSLSt65		46,4	2			92,8		
brm2	PPSLSt65		46,4	2			92,8		
brm3	PPSLSt65		46,4	2			92,8		
brsu1	PPSLSt125		89,5	2		179,0			
brs1	DFLP200/32 mit Ergo3 Bremsgriff		82,1	2	164,2				
Fbreak Level					164	179	278	557	1114
Wmax Level					164	179	278	557	1114 daN
					132,6	179,0	132,6	132,6	132,6